
Layout handoff - 24 × 32 inches
3 columns x 4 rows of eight-inch blocks
10 Nine-Patch + 2 two-triangle blocks
Draft: cutting and sewing unverified.

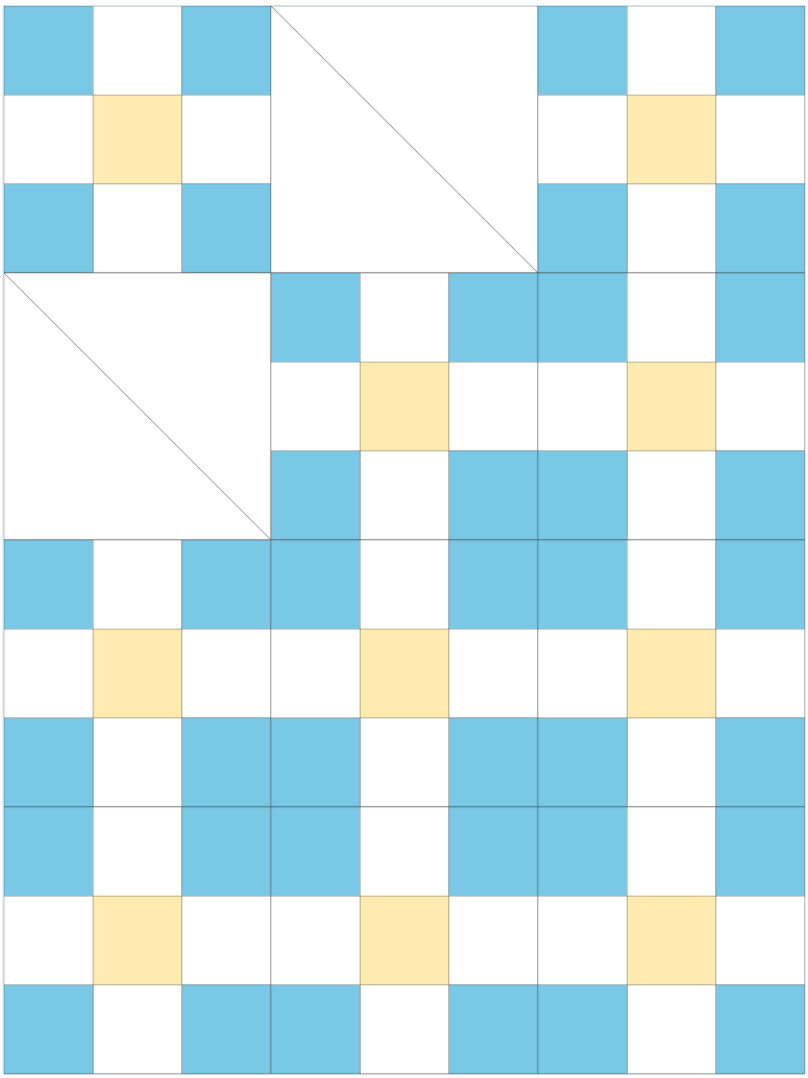

ROW MAP AND HANDOFF CHECKS

Rows run top to bottom; columns run left to right.

N = Nine-Patch; T = two-triangle square.

Row 1: N | T | N

Row 2: T | N | N

Row 3: N | N | N

Row 4: N | N | N

MANUAL ASSEMBLY NOTES

Label blocks R1C1 through R4C3 before joining.

Keep both T diagonals upper left to lower right.

Check all 12 positions against the image after layout changes.

The 94 drawn regions (90 squares + 4 triangles) are not a cut list.

DECISIONS STILL TO VERIFY

Block construction method: _____

Seam allowance: _____

Cut sizes and cutting plan: _____

Unfinished block checkpoint: _____

Pressing directions: _____

Fabric requirements and usable width: _____

Backing, batting and binding: _____

Sewn sample and independent test: _____

Complete and test these instructions before sewing a batch.